



Infrared Conveyor Ovens

Foodservice Equipment

Job \_\_\_\_\_ Item# \_\_\_\_\_

# Conveyor Oven Gemini Model DZ55II with MenuSelect®



**Model DZ55II**  
Shown on Optional Base

### Application

CTX conveyor ovens are designed to cook, bake or broil in high volume with consistent quality results.

### General Information

Heavy-duty, electric, conveyor ovens are designed for mounting on a modular base. Oven consists of 2 complete and separated cooking chambers (decks), equipped with 18" wide stainless steel chain link belt. Overall dimensions are 83"W by 36"D by 28"H. Oven chambers are 55"W by 22½"D by 5½"H. Ovens may be stacked two high on a short base.

### Construction

The outer body is constructed with 18-gauge stainless steel. Oven chambers are constructed of welded and reinforced 16-gauge aluminized steel. Infrared heat emitters are enclosed in high-strength thermal conductive steel plates that form the upper and lower housing of the oven chambers.

### Insulation

The oven is fully insulated on all four sides and top with high temperature insulation.

### Electrical

Ovens can be ordered for 208VAC, 240VAC, 380VAC or 415 VAC electrical

utilities. The total power input on 208 and 240VAC is 36.0kW; 380VAC is 32.8kW. The average operating power input is 12.7kW for 208, 240 and 380VAC. Electrical cord knock-outs are provided on the lower left-hand front side panel of the oven. An access panel on the lower, left-front corner of the oven available for making electrical connections.

### Heating

Heating is accomplished with sixteen (16) far-infrared emitters. four infrared emitters are located above and below each oven deck. When food product is placed on the conveyor belt, it cooks as it passes between the top and bottom emitters. Oven operates coolly, quietly and requires minimal ventilation.

### Controls

Each deck is individually controlled by a separate microprocessor, which includes a time/date clock for automatic turn "ON" and turn "OFF", an energy-conserving standby mode and a self-cleaning cycle. Both decks also feature left and right heat zones with directional heat capability from above and below the conveyor. The temperature may be set from 200° to 900°F, and the cooking time range may be set from 1.5 to 240.0 minutes. Each deck has its own power circuit breaker,

manual "ON/OFF" switch, conveyor reversing keyswitch and a mode changing "PROGRAM/OPERATE" keyswitch.

### MenuSelect®

The patented MenuSelect® feature allows the operator to preset up to six different time and temperature combinations into the control that can be recalled by pressing the appropriate preset key, then the computer automatically adjusts time (belt speed) and temperatures. A ready message is displayed when the desired temperatures are reached.

### Agency Data

The Gemini DZ55II is Underwriters' Laboratories, Inc. listed; NSF and Canadian Standards Association certified; and compliant with CE requirements.

### Warranty

Warranted for one year covering parts and labor under the "No Quibble" warranty. USA only.

### Electrical Ordering Information

- 208VAC, 1-Phase and 3-Phase
- 230VAC, 1-Phase and 3-Phase
- 380VAC, 3-Phase
- 380-400V, 3-Phase

*\*Consult the electrical data on the rear side of this specification sheet for connected kW and amperage loading representing your local utility.*

### Accessories At Extra Cost

- ACHST55SH - Base Assembly - Short, 17"
- ACHST55TL - Base Assembly - Tall, 32 1/2"
- ACHSHDZ55 - Stainless Steel Undershelf
- ACSBDZ - Gemini Stacking Bracket
- ACHCDZ - Set Of Two HeatCurtains
- ACET Exit Tray - 15½"
- ACETL Exit Tray - 22½"
- ACSKDZ55BS Service Kit Gemini DZ55II



**A MIDDLEBY COMPANY**


1400 Toastmaster Drive  
Elgin, Illinois 60120 USA  
(847) 741-3300 Fax: (847) 741-0015  
www.middleby.com



# Conveyor Oven Gemini Model DZ55II with MenuSelect®

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

NOTE: ALL FIGURES IN PARENTHESES ARE IN MILLIMETERS.

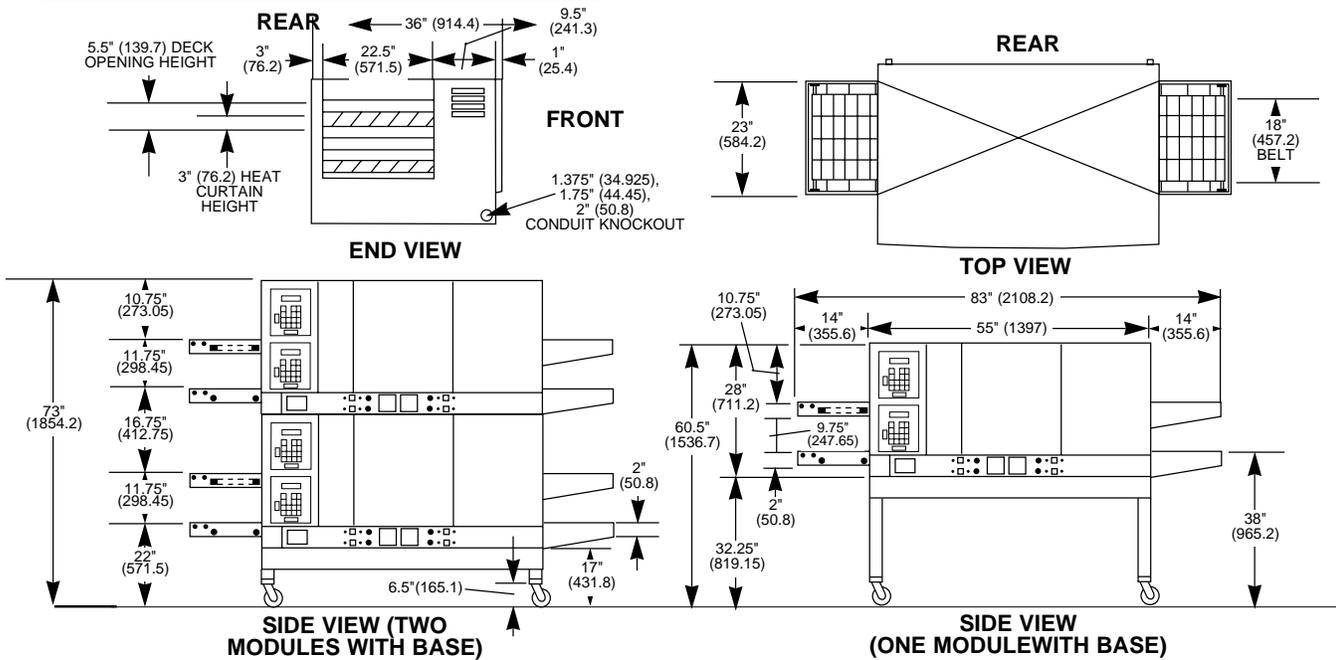

## ELECTRICAL DATA - One Power Supply

MODEL NO.	VOLTS	PHASE	Hz	CONNECTED kW	AVG OPERATING kW	CONNECTED LOAD			
						L1	L2	L3	N
DZ55II	208	1	50/60	36.0	12.7	173	173	--	
DZ55II	208	3	50/60	36.0	12.7	115	115	75	
DZ55II	230	1	50/60	36.0	12.7	157	157	--	
DZ55II	230	3	50/60	36.0	12.7	104	104	68	
DZ55II	380	3	50	32.8	12.7	56	37.3	56	
DZ55II (CE Listed)	380-400	3	50	32.0	--	53	35	53	17

## ELECTRICAL DATA - Two Power Supplies

MODEL	VOLTS	PHASE	Hz	TOTAL kW	AMP LOADING					
					L1		L2		L3	
					A	B	A	B	A	B
DZ55II	208	1	50/60	36.0	43	49	69	42	42	71
DZ55II	208	3	50/60	36.0	38.5	44	62	37.5	37.5	64
DZ55II	230	1	50/60	36.0	87	87	87	87	--	--
DZ55II	230	3	50/60	36.0	78.5	78.5	78.5	78.5	--	--

NET WT OVEN	SHIPPING WEIGHTS			OVEN - SHIPPING DIMENSIONS			BASE - SHIPPING DIMENSIONS		
	OVEN	17" BASE	33" BASE	LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT
770 lbs. 349.27 kg	910 lbs. 412.78 kg	135 lbs. 61.24 kg	150 lbs. 68.04 kg	89" (2261)	42" (1067)	40" (1016)	36.5" (927)	56.5" (1435)	7.5" (191)



1400 Toastmaster Drive, Elgin, IL 60120-9272 USA • (847) 741-3300 • Fax: (847) 741-0015  
www.middleby.com