



Project	
Item No	
Quantity	

# SOLOFILTER SOLSTICE SUPREME

(SSH) SERIES SFSSH55(R), 55T(R). 60(R). 60W(R), 75(R) Gas Fryers



SSFSSH55

\*\* ENERGYSTAR ® Models

#### STANDARD FRYER FEATURES & ACCESSORIES

- Tank stainless steel construction
- Cabinet stainless front, door and sides
- Patented Solstice Burner Technology, No blower or ceramics
- Patented Self Cleaning Burner & Down Draft Protection
- Solid State T-Stat with melt cycle and boil out mode
- Matchless Ignition with DVI drain valve interlock
- High Temperature safety limit switch
- Heavy duty 3/16" bottom door hinge
- 1 1/4" (3.2 cm) Full port drain valve for fast draining
- Separate Manual gas shutoffs, for front servicing
- Integrated flue deflector
- 10"(25.4cm) adjustable legs, easier access to clean
- Tube rack, allows crumbs & debris into cool zone
- Removable basket hanger, requires no tools
- Drain Line Clean out rod
- Fryer cleaner sample packet
- Choice of basket options:
  - 2 Twin Baskets
  - 1 Full Basket (not available on 55T or Basket Lifts)

#### STANDARD FILTER FEATURES & ACCESSORIES

- Easy Two Step Filtering
- Extra Large 3" (7.6cm) curved drain spout virtually eliminates splashing and swivels for oil disposal
- 8 gpm filter pump for fast refill times
- Self Aligning filter connection for effortless hookup
- Rear oil return for bottom cleaning
- Filter pan is stainless with rear wheels for easy handling
- Filter pan lid is self storing and out of the way
- Fryer cleaning brush
- Fryer crumb scoop
- Filter shovel scoop
- Filter paper envelope starter pack
- Filter powder sample

#### HIGH EFFICIENCY SERIES OF GAS FRYERS

For Space Saving Filtering and Energy Saving High Production frying specify Pitco Model SFSSH55(R), SFSSH55T(R), SFSSH60(R), SFSSH60W(R), SFSSH75(R), tube fired gas fryers with Solstice Supreme Burner Technology which provides very dependable atmospheric heat transfer and fuel saving ENERGYSTAR ® \*\* performance without the need for complex power blowers. This patented atmospheric burner system with its long lasting alloy heat baffles reaches up to 70% thermal efficiency and delivers lower flue temperatures. Patented Self Clean Burner goes through a daily 30 second cleaning cycle to keep your burners tuned to operate in the most energy efficient manner. Ventilation troubles are virtually eliminated with the Patented Down Draft Protection that safely monitors your fryer, making this a low maintenance, highly reliable fryer. Simple two step filtering keeps oil filtering convenient and swift to keep oil clean to produce fresher products and to help maximize oil life and profits.

SC	)LO	FILT	ER I	MODEL	_S AV	AILABLE	
	_						

55 Series (40-50 lbs, 1	14" x 14" fry area)
-------------------------	---------------------

- ☐ SFSSH55\*\* (80 Kbtu/hr, 23.4 kW, 84 MJ)
- □ SFSSH55R\*\* (100 Kbtu/hr, 29.3 kW, 105 MJ)

## **55T Twin Vat Series** (20-25 lbs, 7" x 14" fry area/side)

- ☐ SFSSH55T (40K btu/hr, 11.7 kW, 42 MJ /side)
- ☐ SFSSH55TR (50K btu/hr, 14.6 kW, 53 MJ /side)
- **60 Series** (50-60 lbs, 14" x 18" fry area)
  - ☐ SFSSH60\*\* (80K btu/hr, 23.4 kW, 84 MJ)
  - ☐ SFSSH60R\*\* (100K btu/hr, 29.3 kW, 105 MJ)

## 60W Series (50-60 lbs, 18" x 14" fry area)

- ☐ SFSSH60W (100K btu/hr, 29.3 kW, 105 MJ)
- ☐ SFSSH60WR (125K btu/hr, 36.6 kW, 132 MJ)

## **75 Series** (75 lbs, 18" x 18" fry area)


- ☐ SFSSH75 (105K btu/hr, 30.8 kW, 111 MJ)
- SSH75R (125K btu/hr, 36.6 kW, 132 MJ)

#### **OPTIONS & ACCESSORIES (AT ADDITIONAL COST)**

- Digital Controller (2 times w/melt cycle)
- Intellifry I-12 Computer (12 elastic timers w/melt cycle & boil out)
- Backup thermostat (only on Digital and I-12 computer)
- Basket Lift (must be ordered with Digital Control or Computer) (To meet AGA/CGA/CSA specification, must be ordered with casters & installed with flexible gas hose w/restraining cable)
- Stainless Steel back (not available with basket lift)
- 10"(25.4cm) adjustable rear fixed rigid casters only.
- 10" (25.4cm) adjustable rear non locking and front locking rigid casters
- Flexible gas hose with disconnect and restraining cable Tank cover
- 3-Triple Baskets (not available on 55T or Basket Lifts) Consult Factory for other basket configurations
- Splash Guard reversible (L/R) ☐ 6" ☐ 8" ☐ 12" ☐ 18"
- Work shelves call factory for specifications and availabilty.
- Fish Grids (not available on 55T)
- SoloFilter System Options
  - Filter flush hose
  - Filter pump heaters
  - Paperless Filter
  - Waste Oil Management
  - Filter Crumb Catch
- Institutional Prison security package
  - BNB Dump Station, see BNB spec sheet L10-269 for details



## SOLOFILTER SOLSTICE SUPREME SFSSH55(R), 55T(R), 60(R), 60W(R), 75(R)

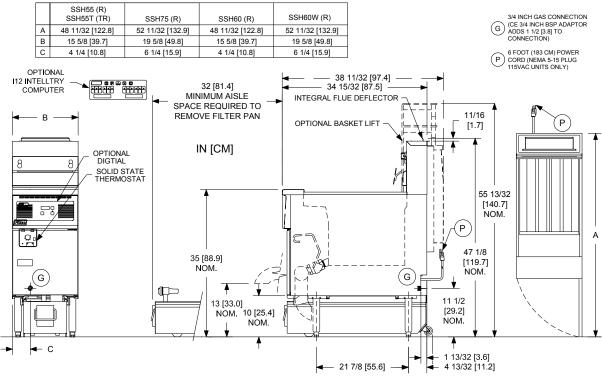

					21 //8 [	55.6]	- 4 13/32 [11.	.2]	
INDIVIDUAL FRYER SPECIFICATIONS									
Model Fr			rying Ar	ying Area		ook Depth		Oil Capacity	
SSH55, 5	5R	14 x 14 i	n (35.6 x	(35.6 cm)	3-1/4 - 5	in (8.3 -12.7 cm	n)	40 - 50 Lbs (18 - 23 kg)	
SSH55T, 55TR	per sid	le 7 x 14 i	n (35.6 x35.6cm)		3-1/4 - 5	in (8.3 -12.7 cn	n)	20 - 25 Lbs (9 -11 kg)	
SSH60, 6	0R	14 x 18 i	n (35.6 x 45.7 cm)		3-1/4 - 5	/4 - 5 in (8.3 -12.7 cm)		50 - 60 Lbs (23 - 27 kg)	
SSH60W, 6	0WR	18 x 14 i	n (45.7 x 35.6 cm)		3-1/4 - 5	3-1/4 - 5 in (8.3 -12.7 cm)		50 - 60 Lbs (23 - 27 kg	
SSH75, 7	5R	18 x 18 i	n (45.7 x 45.7 cm)		3-1/4 - 5	in (8.3 -12.7 cr	n)	75 Lbs (34 kg)	
				FILTER SPE	CIFICATION	S			
For Models	P	an Oil Capacity	Filter	Pump Motor	Filter Pun	np Rated Flow	Fil	ter Media F	Paper Envelope
SSH55,55T,60 (R)	) 6	66 Lbs (29.9 kg)	1/3 HP 50/60 Hz		8 GPM (30.	3 LPM) @ 60 H	z 10	10 x 20-1/2 in (25.4 x 52.1 cm)	
SSH60W,75 (R)		90 Lbs (41 kg)			6.7 GPM (25	.4 LPM) @ 50 H	Hz 1	14 x 22 in (35.6 x 55.9 cm)	
		FR	YER SH	IIPPING INFO	RMATION (A	Approximate)			
Model -Solo Filt	er	Shipping Weight	Add fo	or Each Bsk/Li	ts Shipping Crate Size H x W x L Shipping Cu				Shipping Cube
SSH55, SSH55	R	358 Lbs (162 kg)	458	3 Lbs (208 kg)					
SSH55T, SSH55TR 380 Lbs (172 kg) 48			480	0 Lbs (218 kg)					
SSH60, SSH60		376 Lbs (170 kg	467 Lbs (212 kg)		59 x 23	59 x 23 x 44 in (149.8 x 58.4 x 111.7 cm) 34.6 ft <sup>3</sup> . (1			34.6 ft <sup>3</sup> . (1.0m <sup>3</sup> )
	SSH60W,SSH60WR 425 Lbs (193 kg)		525 Lbs (238 kg)						
SSH75, SSH75R 425 Lbs (193 kg) 525 Lbs (238 kg)									
GAS SYSTEM REQUIREMENTS						ELECTRIC SYSTEM REQUIREMENTS (50/60 hz)			
Gas Type Store Supply Pressure * Burner Manife				Amps	# of Cord		208 / 220-240V		
	, , ,				Fryer/Filter	1	6.1	6.1	
Propane '	11 - 13"	w.c.(27.4 mbars/ 2.	7 kPa)	10" w.c. (25m	bars/2.4 kPa)	For heaters	add 0.43A to	115V or .24	1A to 208/230-240V
* Check plumbing /	gas co	des for proper gas	supply lir	ne sizing to sust	tain burner pre	ssure when all	gas appliar	ices are full	on.

CLEARANCES							
Front min.	Floor min.	Combustible material		Non-Combustible material		Fryer Flue Area	
32"	6"	Sides min.	Rear min.	Sides min.	Rear min.	Do not block / restrict flue gases from flowing into hood	
(76.2 cm)	(15.25 cm)	6" (15.2cm)	6" (15.2cm)	0"	0"	or install vent hood drains over the flue.	
SHORT FORM SPECIFICATIONS							

Provide Pitco SoloFilter Solstice Supreme Model (SSH xxx) tube fired high efficiency, high production gas floor fryer/filter with EnergyStar<sup>TM</sup> performance. Fryer shall be xx-xx lbs oil capacity, xxx Kbtu/hr, xx" by xx" fry area, stainless peened tank, stainless front, door, sides. Blower Free atmospheric burner system with up to 70% thermal efficiency, self cleaning burners, down draft protection, matchless ignition, drain valve interlock, behind the door solid state t-stat with melt and boil mode (or specify optional digital controller or computer controls), separate gas shut off, 3/4" npt rear gas connect, recessed cabinet back, 1-1/4" Full port drain, 3/16" bottom hinge, 10" adjustable legs, manual reset high limit. Drain Line shall be 3" (7.6 cm) diameter with a swivel drain spout for oil disposal. Filter pickup assembly use envelope filter paper. 8 GPM, 60 hz (25.4 LPM 50 hz) filter pump. Filter piping to be self aligning, filter lid integral to cabinet, filter pan to have rear casters for portability, two step filter process. Provide options and accessories as follows:

