




BB96X, BB120X & BB150X CLASSIC CARTER™ BANQUET CARTS For Large Preplated Banquet Meals Up To 12" Diameter

CARTER-HOFFMANN
11 FOOD SERVICE EQUIPMENT
HEATED SERVERS

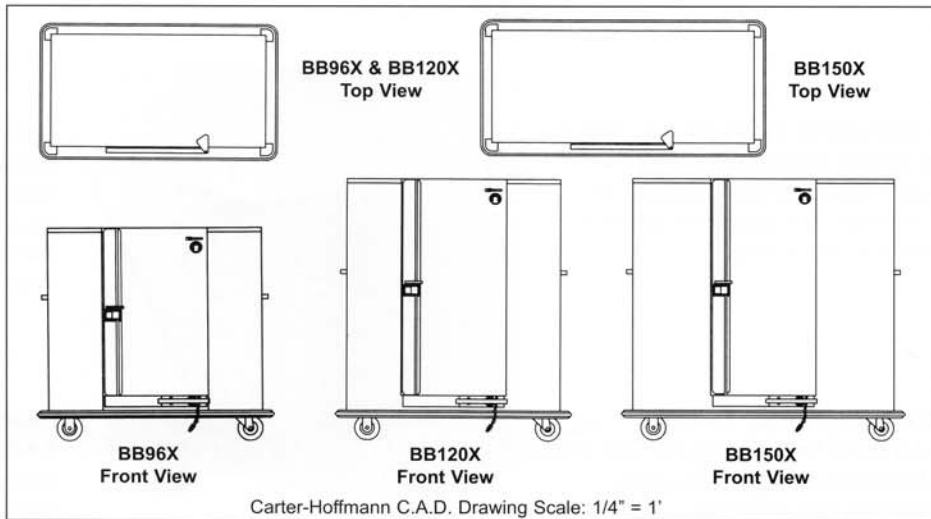

Model Number	Plate Capacity* 10 1/2"-12" dia.		Number of Shelves	Clearance Between Shelves		Overall Dimensions						Caster Diameter		Shipping Weight	
	open	covered		in	mm	Height		Depth		Width		in	mm	lbs	kgs
						in	mm	in	mm	in	mm				
BB96X	96	120	3	13	330	55 1/4	1403	33 1/2	851	56 1/2	1435	6	152	440	220
BB120X	120	144	3	16	406	64 1/2	1638	33 1/2	851	56 1/2	1435	6	152	460	209
BB150X	150	180	3	16	406	64 1/2	1638	33 1/2	851	68 1/2	1740	6	152	470	214

*Capacity depends on stacking height of plates and covers (see "Clearance Between Shelves"). Maximum diameter includes cover.

CONSTRUCTION... Completely welded cabinet construction with outer cabinet formed and welded to base. All seams turned in to eliminate raw edges.

CABINET MATERIAL... Nickel-bearing type 300 series stainless steel; 20 gauge polished exterior wall and 24 gauge interior.

BASE FRAME... 12 gauge stainless steel full depth caster bolsters with 14 gauge stainless steel channels welded to bolsters.

CASTERS... 6" diameter, industrial grade caster with polyurethane tread. Sealed roller axle bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base in offset "wheel ahead" pattern. Two casters fitted with brakes.

BUMPER... Non-marking gray vinyl bumper set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cutouts.

INSULATION... 1" thick high density, continuous wrap-around type fiberglass insulation.

DOOR... Welded double panel stainless steel door. 20 gauge polished exterior and 20 gauge interior. Filled with 1" thick high-density fiberglass insulation.

HINGES... Concealed stainless steel hinges with 5/16" pin.

GASKETS... High temperature silicone gasket mounted to cabinet.

PUSH HANDLES... Two horizontal full width 1" diameter stainless steel tubular handles.

LATCHES... Flush mounted heavy duty sliding latch with exclusive grip handle.

SHELVES... Welded chrome plated removable wire shelves.

THERMOMETER... Dial type with remote sensing bulb and sensing bulb protector.

HEATING SYSTEM... Bottom mounted heater. Stainless steel construction. Removable without tools. 1600 watt inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat and power indicating light.

ELECTRICAL CHARACTERISTICS... Operators on 120 volts, 60 cycle, single phase, 1650 watts, 13.7 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA 5-15P.

PERFORMANCE... Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 25 minutes.

ACCESSORIES/OPTIONS...

- Canned Heat Holders
- Covered Plate Carriers
- Open Plate Carriers
- Top Mounted Transport Latch
- Locking Paddle Latch
- Menu Card Holder
- Lexan Thermometer Cover
- 4 Wheel Brakes
- Alternate Wheel Sizes and Tread Types
- Alternate Electrical Configurations
- Humidity Pan

Specifications subject to change through product improvement & innovation.

CARTER-HOFFMANN CORP.

1551 McCormick Ave., Mundelein, IL 60060
Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981
www.carter-hoffmann.com



SPECIFICATIONS

Printed in U.S.A. B55 0599